

Wound

The LFS wound filter cartridges have been developed on the basis of extensive experience in filtration. Filter cartridges of excellent quality and available for a reasonable price due to the fact that they are produced by means of fast advanced production machines. The diamond shaped openings become smaller towards the core and guarantee a high impurity absorption (depth filtration) and a long lifetime. The yarn can be made of various materials, such as polypropylene, cotton, polyester or nylon. The core materials available are polypropylene, stainless steel and tinned steel. The micron ratings can vary between 0,5µ and 150µ. Other filter elements such as pleated stainless steel, paper or polyester can likewise be supplied. In addition there is an extensive range of filter housings in polypropylene, PVDF and stainless steel, including hygienic housings.



Ordering code: 10MP20F

- F = unwashed PP
- Blank = washed PP

Cartridge length (inches) ——— **Micron rating**

Filter material ——— **Core**


- M = Polypropylene
- PE = Polyester
- C = Bleached cotton
- N = Nylon
- R = PPS

- M = Polypropylene
- X = Stainless steel
- S = Tinned steel

Specifications

Materials	
Filter material	Polypropylene
	Polyester
	Bleached cotton
	Nylon
	PPS (Ryton®)
Core	
	Polypropylene
	Stainless steel
	Tinned steel
Dimensions	
Outside diameter	60 to 110 mm
Inside diameter	27 mm
Length	9¾" to 60"
Other	
Selectivity	0,5 to 150 µ
Connection	DOE
	C2, C3, C7, C8
Max. differential pressure	2,5 bar
Max. temperature (PP)	80°C
Flow rate @ 10" 10µ	1 m³/hr

Pressure drop polypropylene filter cartridges (10") in water 20°C

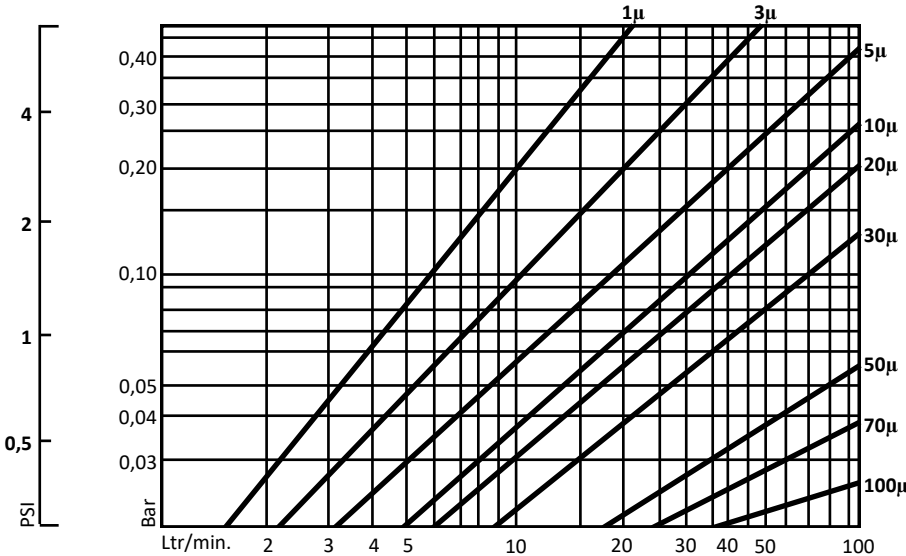

To calculate the pressure drop in other than water.
Multiply the pressure drop in water by the specific gravity of the liquid.

For Clear Solutions